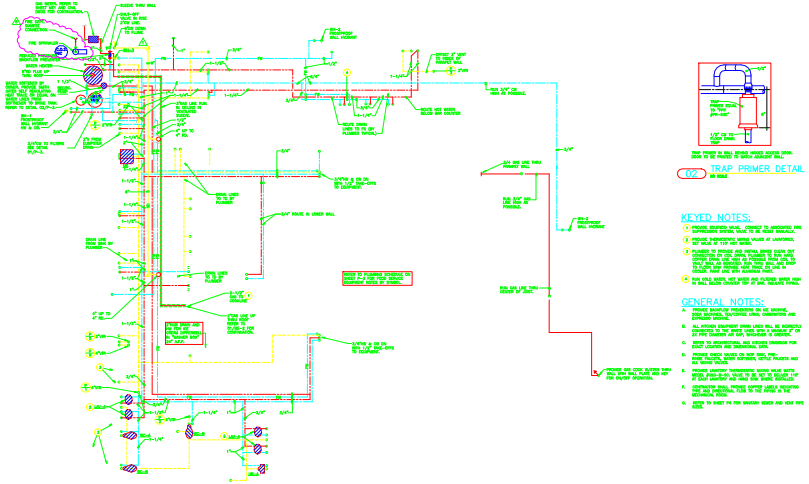

01 FLOOR PLAN – ABOVE FLOOR PLUMBING

KEYED NOTES:

1. PROVIDE SOLENOID VALVE, CONNECT TO ASSOCIATED FIRE SUPPRESSION SYSTEM. REFER TO FIRE SPRINKLER DRAWINGS.
2. PROVIDE THERMOSTATIC MIXING VALVES AT LAVATORIES, SINKS, AND SHOWERS. SEE SCHEDULE.
3. PLUMBING IS PROVIDED FOR INSTALL BOWEL CLEAN OUT CONNECTIONS IN FLOOR DRAINS TO BE USED BY OTHERS. PLUMBING TO PROVIDE ANY INSTALL BOWEL CLEAN OUT CONNECTIONS IN FLOOR DRAINS TO BE USED BY OTHERS. PLUMBING TO PROVIDE ANY INSTALL BOWEL CLEAN OUT CONNECTIONS IN FLOOR DRAINS TO BE USED BY OTHERS. PLUMBING TO PROVIDE ANY INSTALL BOWEL CLEAN OUT CONNECTIONS IN FLOOR DRAINS TO BE USED BY OTHERS.
4. RUN HOT WATER LINE UNDER SLAB TO SINK. SEE ARCHITECTURAL PLANS.

GENERAL NOTES:

A. PROVIDE SHOP/FIELD WELDING OF ALL PIPING, INCLUDING ALL PIPE SUPPORTS, METAL FABRICATIONS AND ANCHOR BOLTS.
B. ALL KITCHEN EQUIPMENT DRAIN LINES WILL BE INDIRECTLY CONNECTED TO THE SANITARY SEWER SYSTEM BY MEANS OF AN AIR GAP, RECEPTACLE OR INDIRECT WASTE.
C. REFER TO ARCHITECTURAL AND KITCHEN DRAWINGS FOR EXACT LOCATION AND DIMENSIONAL DATA.
D. PROVIDE CHECK VALVES ON BOOT PUMP DISCHARGE PIPING AND ON ALL WATER HEATER RECIRCULATION PIPING AND ALL WATER HEATERS.
E. PROVIDE LAUNDRY THERMOSTATIC MIXING VALVE WITH SPECIAL PURPOSE VALVE OF 30 GPM, ADJUSTED TO 120°F AT THE FARTHEST LAUNDRY FIXTURE.
F. COORDINATE WALL PENETRATIONS WITH GENERAL CONTRACTOR. SEE ARCHITECTURAL PLANS AND SECTIONS FOR LOCATIONS AND DETAILS OF THE ARCHITECTURAL WORK.
G. REFER TO SHEET P0 FOR SANITARY SEWER AND VENT PIPE SIZES.

02 TRAP PRIMER DETAIL

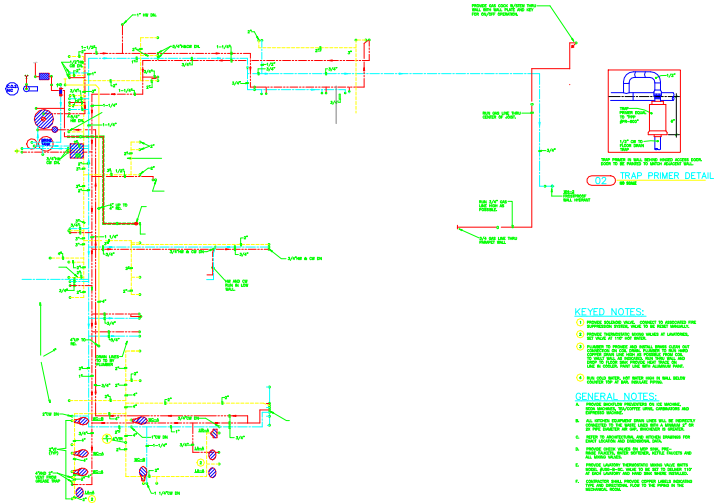

02 TRAP PRIMER DETAIL

KEYED NOTES:

1. PROVIDE SOLENOID VALVE, CONNECT TO ASSOCIATED FIRE SUPPRESSION SYSTEM. REFER TO FIRE SPRINKLER DRAWINGS.
2. PROVIDE THERMOSTATIC MIXING VALVES AT LAVATORIES, SINKS, AND SHOWERS. SEE SCHEDULE.
3. PLUMBING IS PROVIDED FOR INSTALL BOWEL CLEAN OUT CONNECTIONS IN FLOOR DRAINS TO BE USED BY OTHERS. PLUMBING TO PROVIDE ANY INSTALL BOWEL CLEAN OUT CONNECTIONS IN FLOOR DRAINS TO BE USED BY OTHERS. PLUMBING TO PROVIDE ANY INSTALL BOWEL CLEAN OUT CONNECTIONS IN FLOOR DRAINS TO BE USED BY OTHERS.
4. RUN HOT WATER LINE UNDER SLAB TO SINK. SEE ARCHITECTURAL PLANS.

GENERAL NOTES:

A. PROVIDE SHOP/FIELD WELDING OF ALL PIPING, INCLUDING ALL PIPE SUPPORTS, METAL FABRICATIONS AND ANCHOR BOLTS.
B. ALL KITCHEN EQUIPMENT DRAIN LINES WILL BE INDIRECTLY CONNECTED TO THE SANITARY SEWER SYSTEM BY MEANS OF AN AIR GAP, RECEPTACLE OR INDIRECT WASTE.
C. REFER TO ARCHITECTURAL AND KITCHEN DRAWINGS FOR EXACT LOCATION AND DIMENSIONAL DATA.
D. PROVIDE CHECK VALVES ON BOOT PUMP DISCHARGE PIPING AND ON ALL WATER HEATER RECIRCULATION PIPING AND ALL WATER HEATERS.
E. PROVIDE LAUNDRY THERMOSTATIC MIXING VALVE WITH SPECIAL PURPOSE VALVE OF 30 GPM, ADJUSTED TO 120°F AT THE FARTHEST LAUNDRY FIXTURE.
F. COORDINATE WALL PENETRATIONS WITH GENERAL CONTRACTOR. SEE ARCHITECTURAL PLANS AND SECTIONS FOR LOCATIONS AND DETAILS OF THE ARCHITECTURAL WORK.
G. REFER TO SHEET P0 FOR SANITARY SEWER AND VENT PIPE SIZES.
H. CONSTRUCTION WALL PENETRATIONS SHOWN LARGER REQUIRING SLEEVES SHALL BE SIZED TO FIT THE PIPING OR THE INSULATION, WHICHEVER IS LARGER.